



	Charge statique maximale Max static load	Dimensions Dimensions
ACN6 ACN15 ACN30 ACN50	6 / 15 / 30 / 50 kg	300 x 300 mm
ACN60 ACN120	60 / 120 kg	400 x 400 mm
ACN60L ACN150 ACN300	60 / 150 / 300 kg	600 x 600 mm
ACN600	600 kg	800 x 800 mm

OPTIONS SUR DEMANDE :	OPTIONS ON REQUEST :
- Majoration pour portée hors standard	- Additional price for non-standard platforms
- Version ATEX  II 1 GD (zone 0-1-2-20-21-22)	- ATEX version  II 1 GD (zone 0-1-2-20-21-22)
- Colonne porte-indicateur en acier inox (Ø 38 mm, h 700 mm) avec bride en acier inox pour fixation sur plateforme	- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with stainless steel bracket for platform mounting
- Colonne porte-indicateur en acier inox (Ø 38 mm, h 700 mm) avec bride en acier verni pour fixation sur plateforme	- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with painted steel bracket for platform mounting


 **APPROBATION OIML R60 C3**
C3 OIML R60 C3 APPROVED

 **Sur demande version approuvée OIML R60 C4**
C4 On request OIML R60 C4 version approved

 **ACN60 / ACN120: sur demande version approuvée OIML R60 C5**
C5 ACN60 / ACN120: on request OIML R60 C5 version approved



- STRUCTURE EN TUBULAIRE EN ACIER VERNI
- PLATEAU DE CHARGE EN ACIER INOX AISI 304 POSÉ
- CAPTEUR DE PESAGE EN ALLIAGE D'ALUMINIUM IP65
- PIEDS EN ACIER GALVANISÉ ET POLYAMIDE
- FIXATON POUR COLONNE PORTE-INDICATEUR
- PAINTED STEEL TUBULAR STRUCTURE
- AISI 304 STAINLESS STEEL LOADING TOP (laid)
- SINGLE-POINT IP65 ALUMINUM LOAD CELL
- GALVANIZED STEEL & POLYAMID FEET
- CONNECTION FOR INDICATOR STAND

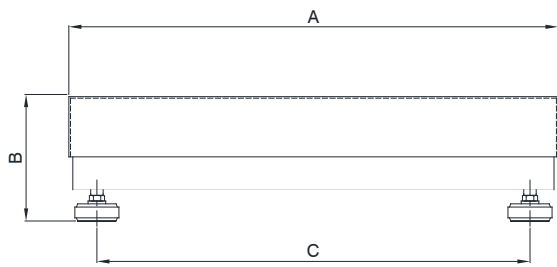

Code	Load cells capacities	Platforms	A	B	C	D	E	F	Gross Weight
ACN6 / 15 / 30 / 50	10 / 20 / 50 / 100 kg	300 x 300 mm	300	125	237	56	1	56	6 kg
ACN60 / 120	100 / 200 kg	400 x 400 mm	400	130	337	52	1	56	8.5 kg
ACN60L / 150 / 300	200 / 500 kg	600 x 600 mm	600	150	537	77	1.5	56	24 kg
ACN600	1000 kg	800 x 800 mm	800	170	715	90	1.5	56	48.5 kg

COLONNE avec BRIDE
STAND with BRACKET



	ACN 6 - 120	ACN 150 - 300	ACN 600
BLINDAGE (SHIELD)			
+ SIGNAL (+SIGNAL)	VERT (GREEN)	VERT (GREEN)	BLEU (BLUE)
+ ALIMENT. (+EXCIT.)	ROUGE (RED)	ROUGE (RED)	ROUGE (RED)
* + REF./SENSE (+REF./SENSE)	BLEU (BLUE)	BLEU (BLUE)	MARRON (BROWN)
- SIGNAL (-SIGNAL)	BLANC (WHITE)	BLANC (WHITE)	BLANC (WHITE)
- ALIMENT. (-EXCIT.)	NOIR (BLACK)	NOIR (BLACK)	JAUNE (YELLOW)
* - REF./SENSE (-REF./SENSE)	MARRON (BROWN)	JAUNE (YELLOW)	NOIR (BLACK)

* Où prévus (where provided)