



460 5 - 100t

accesorios | accessoires | accessories

Soporte completo silo con antivuelco Support complet silo avec anticapotage Mounting kit lift-off prevention for silo



AC46901 (5 - 20 t)

- > En acero cincado.
- > En acier zingué.
- > Steel alloy zinc-plated.

AC46902i (30 - 50 t)

- > En acero inoxidable.
- > En acier inoxydable.
- > Stainless steel.

AC46901i (5 - 20 t)

- > En acero inoxidable.
- > En acier inoxydable.
- > Stainless steel.

AC46903 (75 - 100 t)





- > En acero cincado.
- > En acier zingué.
- > Steel alloy zinc-plated.

AC46902 (30 - 50 t)

- > En acero cincado.
- > En acier zingué.
- > Steel alloy zinc-plated.

AC46903i (75 - 100 t)

- > En acero inoxidable.
- > En acier inoxydable.
- > Stainless steel.

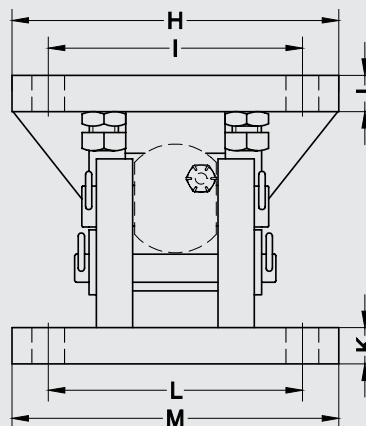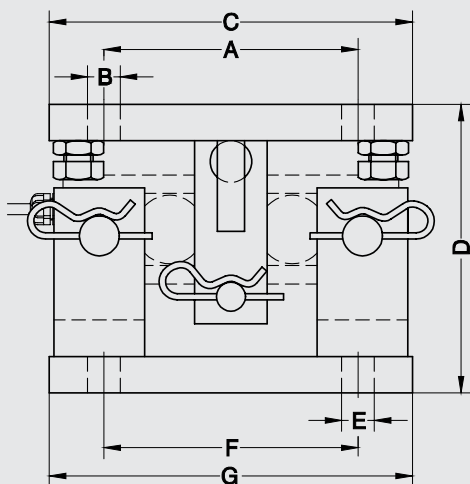

Accesorio Accessoire Accessory	Carga nominal Charge nominale Nominal load	Peso transporte Poids transport Transport weight	A	BØ	C	D	EØ	F	G	H	I	J	K	L	M
46901 / 46901i	5 - 20 t	17 kg	140	18	200	160	18	140	200	180	140	20	20	140	180
46902 / 46902i	30 - 50 t	39 kg	175	22	300	200	22	175	300	220	175	25	25	175	220
46903 / 46903i	75 - 100 t	82 kg	220	26	370	270	26	220	370	300	220	30	30	220	300

dimensiones en mm | dimensions en mm | dimensions in mm.

ESPECIFICACIONES

SPÉCIFICATIONS

SPECIFICATIONS

		Accesorio Accessoires Accessories		
		46901/i	46902/i	46903/i
Capacidad	Capacité	Nominal load		
Máx. desplazamiento transversal de célula	Déplacement transversal max. du capteur	Max. transverse displacement of load cell	± 5	± 5
Máx. fuerza admisible de levantamiento	Force admissible de soulèvement max.	Maximum permissible lifting force	90	210
Máxima fuerza lateral admisible	Force latérale admissible maximale.	Maximum permissible lateral force	4550	8600
			12000	kg

ACCESORIOS | ACCESSOIRES | ACCESSORIES

Opciones y accesorios | Options et accessoires | Options and accessories

	Ref.
Soporte completo silo con antivuelco, células 5 - 20 t. Support complet silo avec anticapotage, capteurs 5 - 20 t. Mounting kit lift-off prevention for silo, capteurs 5 - 20 t.	Acero cincado Acier zingué Steel alloy zinc-plated AC46901 Acero inoxidable Acier inoxydable Stainless Steel AC46901i
Soporte completo silo con antivuelco, células 30 - 50 t. Support complet silo avec anticapotage, capteurs 30 - 50 t. Mounting kit lift-off prevention for silo, capteurs 30 - 50 t.	Acero cincado Acier zingué Steel alloy zinc-plated AC46902 Acero inoxidable Acier inoxydable Stainless Steel AC46902i
Soporte completo silo con antivuelco, células 75 - 100 t. Support complet silo avec anticapotage, capteurs 75 - 100 t. Mounting kit lift-off prevention for silo, capteurs 75 - 100 t.	Acero cincado Acier zingué Steel alloy zinc-plated AC46903 Acero inoxidable Acier inoxydable Stainless Steel AC46903i