

HS series

HS series crane scale



◆ Multi-weighing units:

Kg, lb, N are selectable, generally kg is the default unit.

◆ Multi-function operation:

Tare; Zero; Auto zero tracking; Total; Hold; Overload warning and record, operate through remote controller ,etc functions.

◆ User-friendly design:

Cast aluminium housing for maximum protection; Large red 5 digit LED display (digit height 30mm); Battery Operated with low battery indication; Automatic turn off , power-saving function.

◆ Multi-weighing units:

Kg, lb, N are selectable, generally kg is the default unit.

◆ Multi-function operation:

Tare; Zero; Auto zero tracking; Total; Hold; Overload warning and record, operate through

remote controller ,etc functions.

◆User-friendly design:

Cast aluminium housing for maximum protection; Large red 5 digit LED display (digit height 30mm); Battery Operated with low battery indication; Automatic turn off , power-saving function.

Specification:

◆Multi-weighing units:

Kg, lb, N are selectable, generally kg is the default unit.

◆Multi-function operation:

Tare; Zero; Auto zero tracking; Total; Hold; Overload warning and record, operate through remote controller ,etc functions.

◆User-friendly design:

Cast aluminium housing for maximum protection; Large red 5 digit LED display (digit height 30mm); Battery Operated with low battery indication; Automatic turn off , power-saving function.

Standard	According to OIML class III			
Display	30mm (1.2'') 5digits LCD/LED			
Zero Range	4% F.S.			
Tare Range	100% F.S.			
Stable Time	≤10seconds			
Overload Indication	100% F.S. + 9e			
Max. Safety Load	125% F.S.			
Ultimate Load	400% F.S.			
Battery Life	≥50 hours			
Battery Type	Fully sealed Lead-Acid battery, 6V/4.5Ah			
Adapter	DC9V/1000mA			
Operating Humidity	≤85% RH under 20℃			
Remote Controller Distance	Min. 15m			
Battery of Remote Controller	AAA battery, 1.5V×2			
MODEL	Max. capacity(kg)	Min. weigh(kg)	Division(kg)	Total count
HS-2	2000	20	1	2000
HS-3	3000	20	1	3000
HS -5	5000	40	2	2500
HS -10	10000	100	5	3000
HS -15	15000	200	5	3000
HS -20	20000	200	10	2000

--	--	--	--	--	--

Main technical data

◆Multi-weighing units:


Kg, lb, N are selectable, generally kg is the default unit.

◆Multi-function operation:

Tare; Zero; Auto zero tracking; Total; Hold; Overload warning and record, operate through remote controller ,etc functions.

◆User-friendly design:

Cast aluminium housing for maximum protection; Large red 5 digit LED display (digit height 30mm); Battery Operated with low battery indication; Automatic turn off , power-saving function.

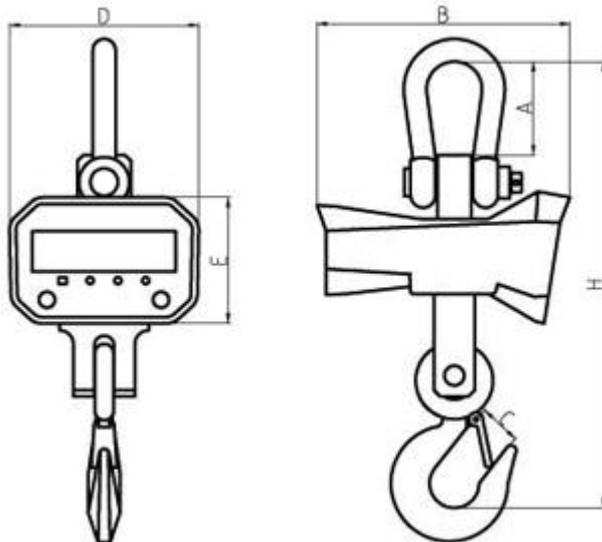

MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	H(mm)
HS -2	95	260	33	195	135	430
HS -3	95	260	40	195	135	455
HS -5	120	325	50	240	165	535
HS -10	124	325	60	240	165	660
HS -15	225	345	70	240	165	855
HS -20	225	345	85	240	165	920